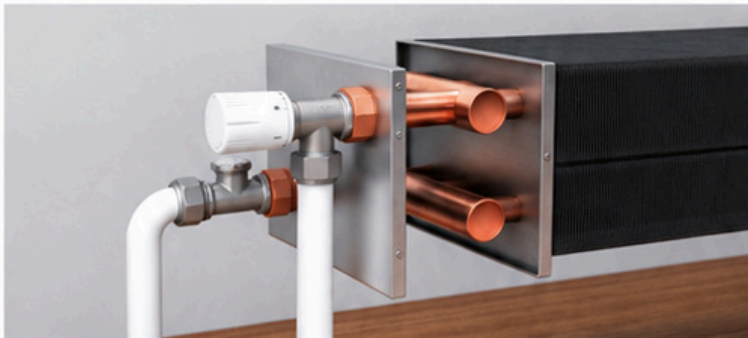


Freestanding Convactor

Series 02

Freestanding Convactor Series 02 features a sleek, streamlined design with concealed piping for a clean, elegant appearance. Its smooth, rounded edges enhance safety, making it ideal for high-traffic spaces such as malls, hospitals, and sales halls.



01

Precision connection design.

02

Hidden valve design
for easy control.



03


Concealed piping and rounded,
sharp-free edges for a sleek,
decorative look.




Freestanding Convector

Series 02


STDDMYD-300-130/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-300-130/800	748	549	310	
STDDMYD-300-130/1000	978	718	405	
STDDMYD-300-130/1200	1208	887	501	
STDDMYD-300-130/1400	1438	1056	596	
STDDMYD-300-130/1600	1668	1225	692	
STDDMYD-300-130/1800	1898	1394	787	
STDDMYD-300-130/2000	2128	1563	882	
STDDMYD-300-130/2200	2358	1732	978	


STDDMYD-300-170/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-300-170/800	796	586	331	
STDDMYD-300-170/1000	1041	766	433	
STDDMYD-300-170/1200	1286	946	534	
STDDMYD-300-170/1400	1531	1126	636	
STDDMYD-300-170/1600	1776	1306	738	
STDDMYD-300-170/1800	2021	1487	840	
STDDMYD-300-170/2000	2266	1667	942	
STDDMYD-300-170/2200	2511	1847	1043	


STDDMYD-300-200/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-300-200/800	943	693	391	
STDDMYD-300-200/1000	1233	906	511	
STDDMYD-300-200/1200	1523	1119	631	
STDDMYD-300-200/1400	1813	1333	751	
STDDMYD-300-200/1600	2103	1546	871	
STDDMYD-300-200/1800	2393	1759	992	
STDDMYD-300-200/2000	2683	1972	1112	
STDDMYD-300-200/2200	2973	2185	1232	


STDDMYD-300-240/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-300-240/800	1364	1002	566	
STDDMYD-300-240/1000	1783	1311	740	
STDDMYD-300-240/1200	2203	1619	914	
STDDMYD-300-240/1400	2623	1928	1088	
STDDMYD-300-240/1600	3042	2236	1262	
STDDMYD-300-240/1800	3462	2544	1436	
STDDMYD-300-240/2000	3881	2853	1610	
STDDMYD-300-240/2200	4301	3161	1784	


STDDMYD-350-130/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-350-130/800	773	568	321	
STDDMYD-350-130/1000	1011	743	420	
STDDMYD-350-130/1200	1248	918	518	
STDDMYD-350-130/1400	1486	1093	617	
STDDMYD-350-130/1600	1724	1268	716	
STDDMYD-350-130/1800	1962	1443	815	
STDDMYD-350-130/2000	2200	1617	913	
STDDMYD-350-130/2200	2437	1792	1012	


STDDMYD-350-170/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-350-170/800	824	605	342	
STDDMYD-350-170/1000	1077	791	447	
STDDMYD-350-170/1200	1330	977	552	
STDDMYD-350-170/1400	1584	1164	657	
STDDMYD-350-170/1600	1837	1350	762	
STDDMYD-350-170/1800	2091	1536	867	
STDDMYD-350-170/2000	2344	1722	972	
STDDMYD-350-170/2200	2597	1908	1077	


STDDMYD-350-200/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-350-200/800	977	770	406	
STDDMYD-350-200/1000	1278	1007	531	
STDDMYD-350-200/1200	1578	1244	655	
STDDMYD-350-200/1400	1879	1480	780	
STDDMYD-350-200/1600	2179	1717	905	
STDDMYD-350-200/1800	2480	1954	1030	
STDDMYD-350-200/2000	2781	2191	1155	
STDDMYD-350-200/2200	3081	2428	1280	


STDDMYD-350-240/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-350-240/800	1388	1020	575	
STDDMYD-350-240/1000	1815	1334	752	
STDDMYD-350-240/1200	2242	1648	929	
STDDMYD-350-240/1400	2669	1962	1106	
STDDMYD-350-240/1600	3096	2276	1283	
STDDMYD-350-240/1800	3523	2590	1461	
STDDMYD-350-240/2000	3950	2904	1638	
STDDMYD-350-240/2200	4377	3218	1815	


STDDMYD-400-130/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-400-130/800	788	580	328	
STDDMYD-400-130/1000	1031	758	429	
STDDMYD-400-130/1200	1274	937	530	
STDDMYD-400-130/1400	1516	1115	630	
STDDMYD-400-130/1600	1759	1293	731	
STDDMYD-400-130/1800	2001	1472	832	
STDDMYD-400-130/2000	2244	1650	933	
STDDMYD-400-130/2200	2487	1828	1034	


STDDMYD-400-170/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-400-170/800	849	624	352	
STDDMYD-400-170/1000	1110	816	460	
STDDMYD-400-170/1200	1371	1008	569	
STDDMYD-400-170/1400	1633	1200	677	
STDDMYD-400-170/1600	1894	1392	785	
STDDMYD-400-170/1800	2155	1584	894	
STDDMYD-400-170/2000	2416	1777	1002	
STDDMYD-400-170/2200	2677	1969	1110	


STDDMYD-400-200/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-400-200/800	1019	749	423	
STDDMYD-400-200/1000	1333	980	553	
STDDMYD-400-200/1200	1646	1211	683	
STDDMYD-400-200/1400	1960	1441	813	
STDDMYD-400-200/1600	2274	1672	943	
STDDMYD-400-200/1800	2587	1902	1074	
STDDMYD-400-200/2000	2901	2133	1204	
STDDMYD-400-200/2200	3214	2364	1334	


STDDMYD-400-240/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-400-240/800	1422	1046	590	
STDDMYD-400-240/1000	1860	1368	772	
STDDMYD-400-240/1200	2297	1689	953	
STDDMYD-400-240/1400	2735	2011	1135	
STDDMYD-400-240/1600	3173	2333	1316	
STDDMYD-400-240/1800	3610	2655	1498	
STDDMYD-400-240/2000	4048	2976	1680	
STDDMYD-400-240/2200	4485	3298	1861	


STDDMYD-450-130/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-450-130/800	813	597	337	
STDDMYD-450-130/1000	1063	781	441	
STDDMYD-450-130/1200	1313	965	544	
STDDMYD-450-130/1400	1563	1149	648	
STDDMYD-450-130/1600	1813	1333	751	
STDDMYD-450-130/1800	2063	1517	855	
STDDMYD-450-130/2000	2313	1700	959	
STDDMYD-450-130/2200	2563	1884	1062	


STDDMYD-450-170/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-450-170/800	879	646	365	
STDDMYD-450-170/1000	1149	845	477	
STDDMYD-450-170/1200	1420	1044	589	
STDDMYD-450-170/1400	1690	1243	701	
STDDMYD-450-170/1600	1960	1441	813	
STDDMYD-450-170/1800	2231	1640	926	
STDDMYD-450-170/2000	2501	1839	1038	
STDDMYD-450-170/2200	2772	2038	1150	

STDDMYD-450-200/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-450-200/800	1047	771	435	
STDDMYD-450-200/1000	1369	1008	568	
STDDMYD-450-200/1200	1692	1245	702	
STDDMYD-450-200/1400	2014	1482	836	
STDDMYD-450-200/1600	2336	1719	969	
STDDMYD-450-200/1800	2658	1956	1103	
STDDMYD-450-200/2000	2980	2193	1237	
STDDMYD-450-200/2200	3303	2430	1370	

STDDMYD-450-240/Length

Model	Heat Output (W)			Product Diagram
	64°C (95/70/18)	52°C (80/60/18)	34.5°C (60/45/18)	
STDDMYD-450-240/800	1453	1069	603	
STDDMYD-450-240/1000	1901	1398	789	
STDDMYD-450-240/1200	2348	1726	974	
STDDMYD-450-240/1400	2795	2055	1160	
STDDMYD-450-240/1600	3242	2384	1345	
STDDMYD-450-240/1800	3689	2713	1531	
STDDMYD-450-240/2000	4137	3042	1716	
STDDMYD-450-240/2200	4584	3370	1902	